

FLOUR ROLLER MILL

“Kharkovchanka - 4000plus”




MODEL NO.3545 13M

Technical characteristics

Productivity of grain	t/24h	100
Finished product output	%, to	75
high grade flour	to	58..65
incl. manna croup		1,5..2
1 grade flour		10..15
2 grade flour		3..5
Installed power	kW	360
Air consumption	m ³ /h	35300
Average water consumption	l/h	250
Attendants	men.	4
Height	mm	9550
(length and width are on the planning)		
Weight, not more	ton	57

Planning

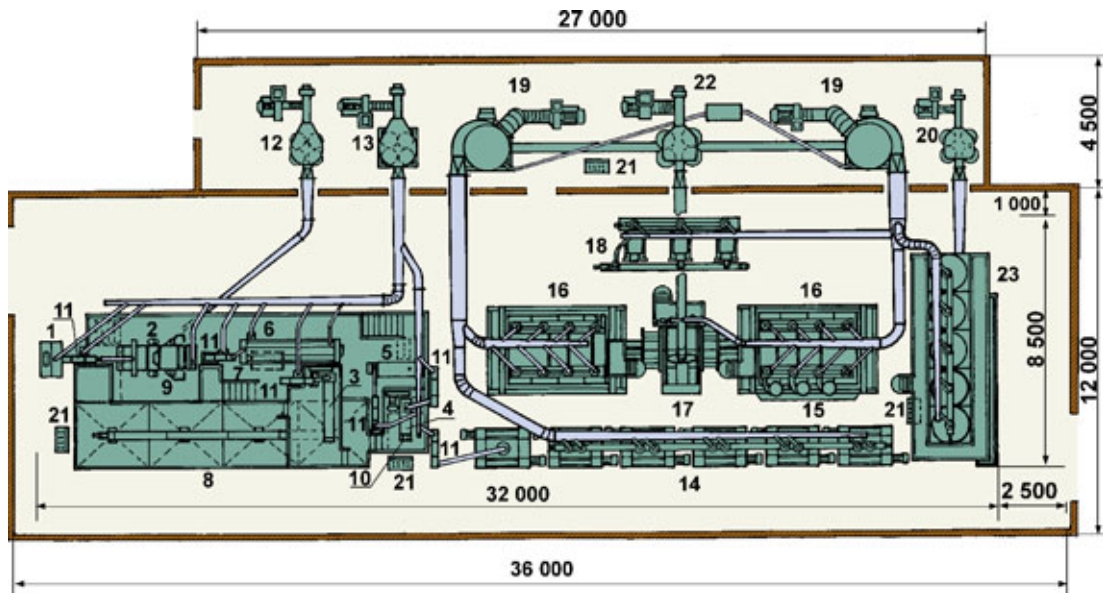

- | | | |
|--|--|---|
| 1. Receiving bunker | 13. Air cleaning unit of grain cleaning section (battery device 4БBZ-550, fan) | 21. Control console |
| 2. Vibratory separator | 14. 4 roller machine “Khartronik-5” Ø250x1000 | 22. Aspiration unit of purifier (battery device 2x2UZ-600, fan) |
| 3. Grain moistening device | 15. Entolator U12-BER | 23. Bagger-weigher |
| 4. Additional grain moistening device | 16. Plansifter RPC8-17 | |
| 5. Brushing machine | 17. Purifier | |
| 6. Grain cleaner unit | 18. Device of dusters | |
| 7. Abrasive grain cleaning machine | 19. Air cleaning unit (bag collector, fan) | |
| 8. Grain binning device | 20. Aspiration unit of bagger-weigher (battery device 4BZ, fan) | |
| 9. Stone cleaner | | |
| 10. Aspirating channel | | |
| 11. Patemoster with productivity 5 T/ч | | |
| 12. Aspiration unit of stone cleaner (battery device 4BZ-450, fan) | | |

The mill can be equipped with automatic system of technological process control (ASTPC)

Equipment placing on production spaces is fulfilled after agreement with the Customer



May 2003.